


O.C. Keckley Company  
 3400 Cleveland Street PO Box 67  
 Skokie, IL 60076  
 Toll Free Telephone: (800) 532-5539  
 Telephone: (847) 674-8422  
 Fax: (847) 674-2106  
 E-Mail: sales@keckley.com  
 Web site: www.keckley.com

**Item # B-250-3/4, Style B 250# threaded Cast Iron Y Strainers**

**Style B 250# threaded Cast Iron Y Strainers**

The KECKLEY Style B Strainers with shell coring have a sound, fine finish casting. Style B Strainer screens through 2" are guided and retained in both body and bushing, assuring protection and appearance, proper alignment and seal. Sizes 2 1/2", 3" and 4" Style B Strainers are provided with a bolted cover.

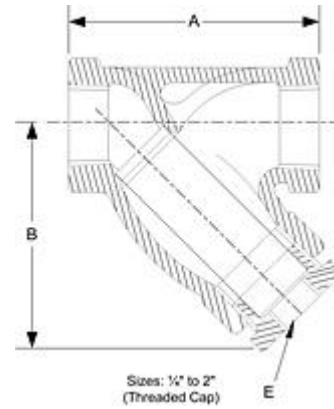

**SPECIFICATIONS**

Product Style	Style B
Size	3/4 Inch
End Connection	Threaded
Type	Y
Material- Body	ASTM A126, Class B
Material- Cover/Cap	ASTM A126, Class B
Standard Screen	20 Mesh, 304 SS
Stainless Steel Perforation- Liquids	20 Mesh Inch
Stainless Steel Perforation- Steam	20 Mesh
Material- Standard Screen	304 Stainless Steel
Working Temp., Non Shock- Water, Oil & Gas	150 °F
Working Pressures-Non Shock Water, Oil & Gas	400 psi

Working Temp., Non Shock- Steam	406 °F
Working Pressure, Non Shock- Steam	250 psi
A	4 Inch
B	3 5/8 Inch
E	1/2 Inch
Capacity	250 lbs.
Shipping Weight (Approx.)	2 1/2 lbs
Note	Other size perforations in stainless steel model brass, or wire mesh are available to meet specific media requirement. If media not indicated, screens for steam will be supplied.

---