


O.C. Keckley Company  
 3400 Cleveland Street PO Box 67  
 Skokie, IL 60076  
 Toll Free Telephone: (800) 532-5539  
 Telephone: (847) 674-8422  
 Fax: (847) 674-2106  
 E-Mail: sales@keckley.com  
 Web site: www.keckley.com

**Item # B-250-2 1/2, Style B 250# threaded Cast Iron Y Strainers**

**Style B 250# threaded Cast Iron Y Strainers**

The KECKLEY Style B Strainers with shell coring have a sound, fine finish casting. Style B Strainer screens through 2" are guided and retained in both body and bushing, assuring protection and appearance, proper alignment and seal. Sizes 2 1/2", 3" and 4" Style B Strainers are provided with a bolted cover.

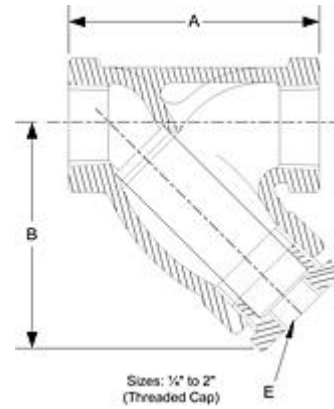

**SPECIFICATIONS**

Product Style	Style B
Size	2 1/2 Inch
End Connection	Threaded
Type	Y
Material- Body	ASTM A126, Class B
Material- Cover/Cap	ASTM A126, Class B
Standard Screen	1/16, 304 SS
Stainless Steel Perforation- Liquids	1/16 Inch
Stainless Steel Perforation- Steam	3/64 Inch
Material- Standard Screen	304 Stainless Steel
Working Temp., Non Shock- Water, Oil & Gas	150 °F
Working Pressures-Non Shock Water, Oil & Gas	400 psi

Working Temp., Non Shock- Steam	406 °F
Working Pressure, Non Shock- Steam	250 psi
A	8 7/8 Inch
B	7 1/2 Inch
E	1 1/4 Inch
Capacity	250 lbs.
Shipping Weight (Approx.)	25 lbs
Note	Other size perforations in stainless steel model brass, or wire mesh are available to meet specific media requirement. If media not indicated, screens for steam will be supplied.

---